

RELY ON EXCELLENCE

## WEF6 Water cooler

API 682 4th edition product range | Seal supply systems | Coolers



### Features

Heat exchangers of the WEF6 range are used to cool process/barrier fluids in seal supply circuits. WEF6 heat exchangers are fully compliant with API 682 4th edition regulations. The process/barrier medium is directed through the tube, and the cooling medium is directed through the shell.

Venting and draining of the process/barrier medium side as well as the cooling water side is ensured. In addition, the heat exchangers can also be combined with a temperature instrument in the supply line to the mechanical seal (optional in accordance with API 682 4th edition).

### Notes

Design and production in accordance with EU Pressure Equipment Directive PED 2014/68/EU. Design, calculation and production acc. to ASME VIII, Div. 1

(cooler not subject to ASME stamp requirements, piping <6")

### Cleaning:

Process/barrier medium side and cooling water side: flush with a suitable solvent.

### Advantages

- Operating limits up to 65 bar / 260 °C (943 PSI / 500 °F) (tube side): suitable for a wide range of operations
- Cooling water and process side can be completely vented and drained
- Seamless pipes on process side
- Special design without welding inside the cooler
- Higher cooling water velocity due to innovative cooler design
- Stainless steel 316/316L: high resistance to corrosive media

### Standards and approvals

- PED 2014/68/EU (Design and production in accordance with EU Pressure Equipment Directive)
- ASME VIII, Div. 1 possible (see notes)
- API 682 4th edition

### Recommended applications

- Refining technology
- Oil and gas industry
- Petrochemical industry
- Chemical industry
- Power plant technology


### Recommended piping plans

Plan 21  
Plan 22  
Plan 23  
Plan 41

RELY ON EXCELLENCE

### WEF6000A4

- A From mechanical seal
- B To mechanical seal
- C Cooling water IN
- D Cooling water OUT
- E Vent
- F Drain

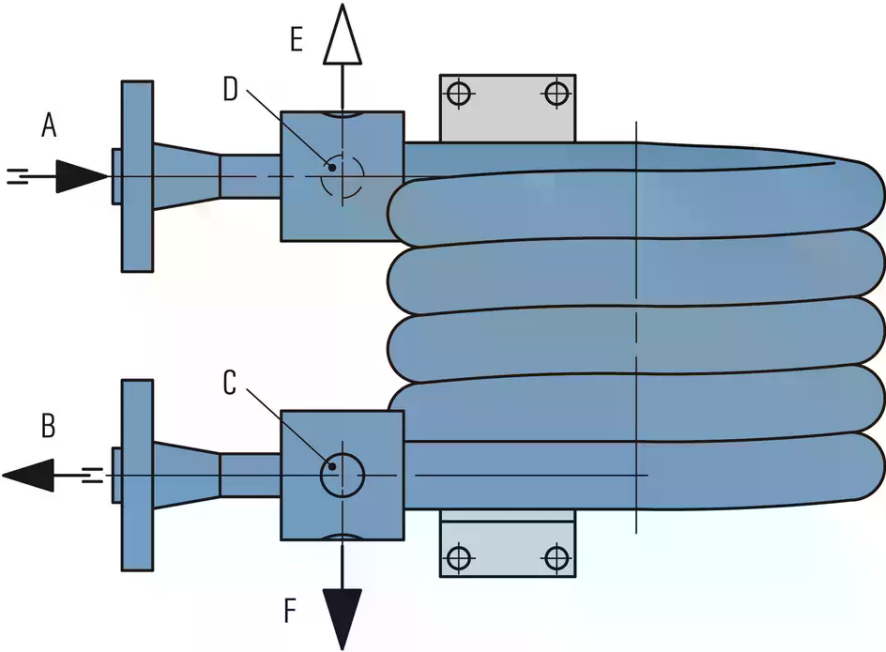

## RELY ON EXCELLENCE

### Installation, details, options

#### Product variants

****	WEF6
Cooler design	Pipe-in-pipe (coaxial)
Conformity	API 682
Design code	ASME VIII, Div. 1 oder PED2014/68/EU
Weight (empty)	28 kg
Process fluid	
Process connections <sup>1)</sup>	Flange 3/4", 600 lbs
Design pressure <sup>1)</sup>	76 bar (g)
Design temperature <sup>1)</sup>	150 °C
Material (metal parts) <sup>1)</sup>	316/316L / 1.4401/1.4404
Cooling water	
Process connections <sup>1)</sup>	3/4" NPT (f)Flange 3/4", 300 lbs
Drain / vent connection <sup>1)</sup>	1/2" NPT (inside)
Design-pressure <sup>1)</sup>	25 bar (g)
Design temperature <sup>1)</sup>	150 °C
Material (metal parts) <sup>1)</sup>	316/316L / 1.4401/1.4404
Cooling capacity depending on process fluid	
Water	(low flow <sup>2)</sup> / high flow <sup>3)</sup> )
Öl ISO VG10	8,2 kW / 12,4 kW
	2,7 kW / 4,1 kW

Other versions on request.

1) Standard design data, extended pressure / temperature rating on request.

2) The cooling performance depends on the available fluids, their temperatures and flow rates. Please contact EagleBurgmann for professionally selecting the correct heat exchanger.