

RELY ON EXCELLENCE

SPT6 Temperature indicator

API 682 4th edition product range | Seal supply systems | Indicators



Features

The measuring unit of the SPT6000A4 range is used to visually monitor the operating temperature.

The measuring unit consists of a bi-metallic temperature gauge (NG100) with protective sleeve installed in a measuring block incl. drain connection.

Advantages

- Operating limits up to 50 bar / 200 °C (725 PSI / 392 °F) (design parameters)
- Temperature indicating range up to 200 °C (392 °F)
- Wetted parts: Stainless steel 316/316L for high resistance to corrosive media

Standards and approvals

- API 682 / ISO 21049
- API 682 4th ed. Cat. 2/3 - 1CW-FL
- API 682 4th ed. Cat. 2/3 - 2CW-CW
- API 682 4th ed. Cat. 2/3 - 2CW-CS
- API 682 4th ed. Cat. 2/3 - 3CW-FB
- API 682 4th ed. Cat. 2/3 - 3CW-BB
- API 682 4th ed. Cat. 2/3 - 3CW-FF
- API 682 4th ed. Cat. 1 - 1CW-FX
- API 682 4th ed. Cat. 1 - 2CW-CW
- API 682 4th ed. Cat. 1 - 3CW-FB


Recommended applications

- Refining technology
- Oil and gas industry
- Petrochemical industry
- Chemical industry
- Power plant technology

Recommended piping plans

Plan 21
Plan 22
Plan 23
Plan 41

RELY ON EXCELLENCE

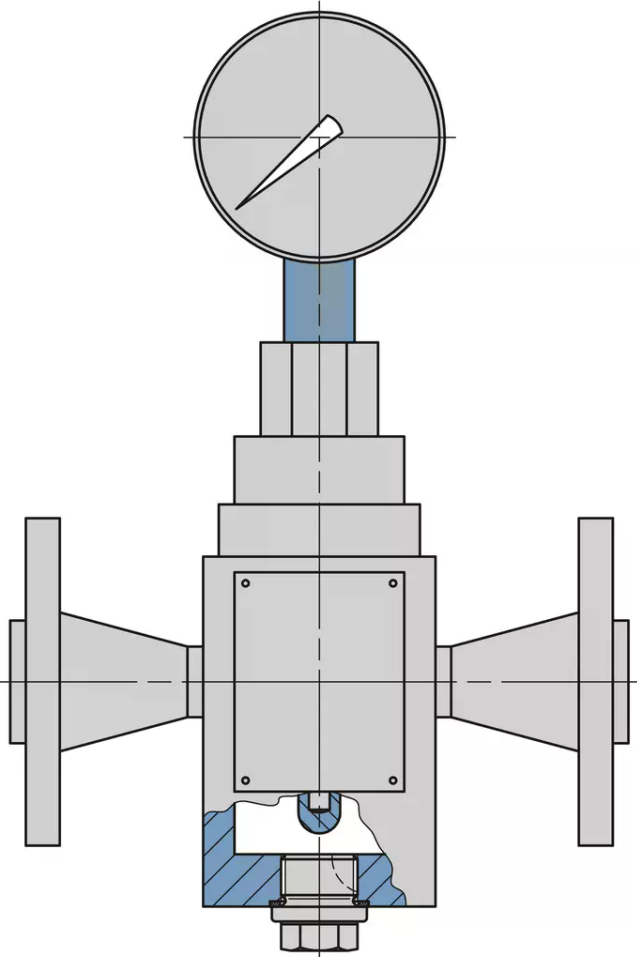

RELY ON EXCELLENCE

Installation, details, options

Product variants

Designation	SPT6000A4	SPT6000A4
Process connections	Flange 3/4", 600 lbs	Flange 3/4", 600 lbs
Drain connection	G 1/2"	G 1/2"
Allowable pressure ¹⁾	50 bar (725 PSI)	50 bar (725 PSI)
Temperature range	0 °C ... +120 °C(+32 °F ... +248 °F)	0 °C ... +200 °C(+32 °F ... +392 °F)
Wetted parts	316/316L	316/316L

Other versions on request.

1) Design data, permissible working values depend on the actual conditions of service.