

RELY ON EXCELLENCE

MR-D

Mechanical Seals | Agitator seals | Liquid lubricated seals



Features

- For top, side and bottom entry drives
- Seat at product side rotating
- Unbalanced
- Liquid-lubricated
- Double seal
- Independent of direction of rotation
- Cartridge unit
- With or without bearing available

Notes

Options:

- Cooling resp. heating flange
- Temperature sensor
- Axial expansion joint (shaft movement)
- Wiper ring (shaft movement)
- Shaft sleeve not in contact with product (with standard diameters)
- Metal-free on product side

Please inquire.

Advantages

- Smooth surface, free of dead spaces
- CIP-/SIP (Cleaning in Place, Sterilization in Place) capable
- Sliding materials FDA conform
- Variant for sterile applications available
- ATEX certification on request

Operating range

Shaft diameter:

d1 = 35 ... 140 (500) mm
(1.38" ... 5.51" (19.68"))

Axial offset shaft/housing:

d1 = 35 ... 60 mm
(1.38" ... 2.36"): max. ±1.5 mm (0.059")

d1 > 60 mm (2.36"): max. ±2.0 mm (0.079")

Radial offset shaft/housing:

max. ±0.3 mm (0.012")

Pressure:

p1 = vacuum ... 14 (23) bar (203 (334) PSI)

p3 = max. 16 (25) bar (232 (363) PSI)

Δ p3-p1 = 2 ... 10 bar (29 ... 145 PSI),

higher Δp on request

Temperature: t1 = -20 °C ... +200 (300) °C

(-4 °F ... +392 (572) °F)

Sliding velocity:

vg = max. 10 (20) m/s (33 (66) ft/s)

For applications beyond this range and for values in brackets, please inquire.

! It should be noted that the extremal values of each operating parameter cannot be applied at the same time because of their interaction.

Materials

Seal faces: Silicon carbide, FDA conform
Seat: Carbon graphite (atmosphere side) resp. Silicon carbide (product side), FDA conform
Secondary seals and metallic parts acc. to application and customers' requirement.

Standards and approvals

- FDA
- Compliant to TA Luft (German Clean Air Act)

Recommended applications

- Petrochemical industry
- Chemical industry
- Pharmaceutical industry
- Food and beverage industry
- Mixers
- Dryers
- Mills
- Kneaders
- Reactors
- Pressure filters

Recommended piping plans


Closed circuit: EagleBurgmann TS system, EagleBurgmann DRU pressure booster,
Open circuit: EagleBurgmann SPA / SPN

Product links:

[EagleBurgmann TS1000](#)
[EagleBurgmann TSA2](#)
[EagleBurgmann TS3016 \(sterile version\)](#)
[EagleBurgmann DRU](#)
[EagleBurgmann SPA](#)
[EagleBurgmann SPN manual](#)
[EagleBurgmann SPN automatic](#)

RELY ON EXCELLENCE

Variante
MR35...-D

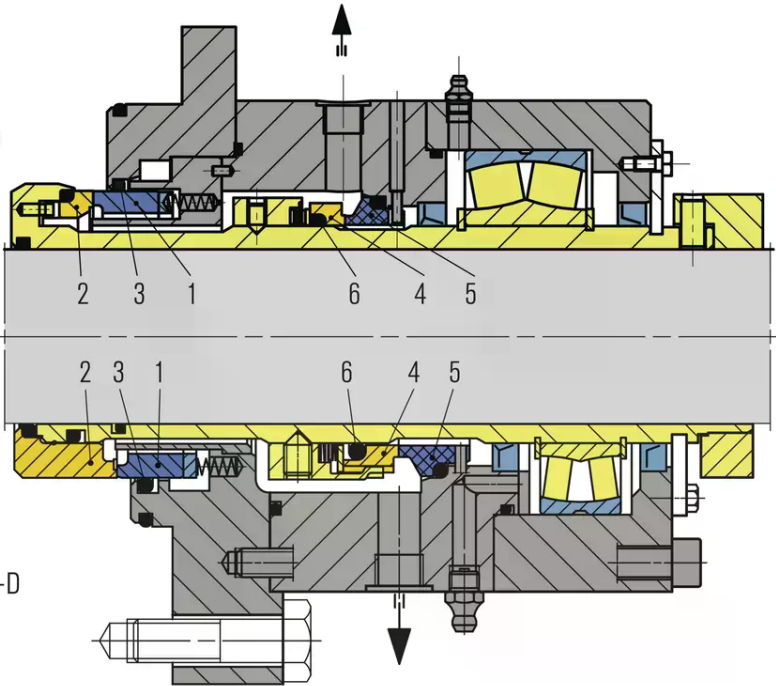


Variante
MR333...-D

Item	Description
1	Seal face, product side
2	Seat, product side
3, 6	O-Ring, dynamic
4	Seal face, atmosphere side
5	Seat, atmosphere side


RELY ON EXCELLENCE

Torque transmissions


Drive key

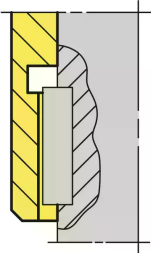

Clamping set

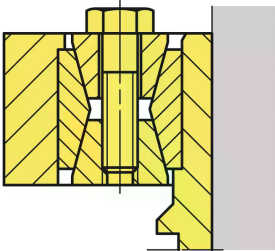


Shrink disc

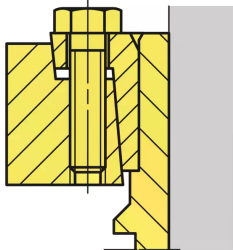


RELY ON EXCELLENCE


Clamping ring with pin

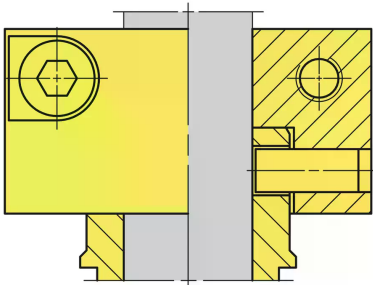

Clamping ring

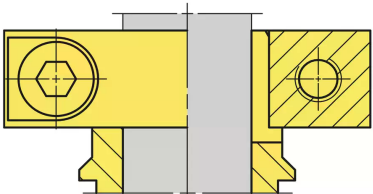

Installation, details, options

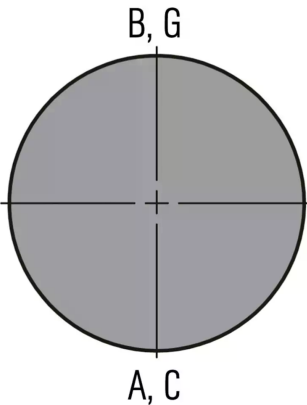

- Supply connections**
A Barrier fluid IN
B Barrier fluid OUT
C Drainage
G Grease