

RELY ON EXCELLENCE

SHI300

Mechanical Seals | Mechanical seals for pumps | Engineered Seals



Features

- Robust seal design - suitable for demanding light hydrocarbon applications
- Compact cartridge seal - can be fitted in older pumps with small seal chambers
- Unpressurized inboard seal with a high pressure-non contacting containment seal on the outboard - fully-rated to pipeline pressure
- Stationary spring loaded unit
- Balanced primary seal faces - in materials with high thermal conductivity and strength
- Multi-point injection - uniform heat distribution
- DiamondFace® technology optional

Advantages

Operational Excellence

- High Performance seal for single and multi fluid type pipeline services with variable pressures and speeds
- Low amount of heat generation, hence minimal temperature rise in the seal faces
- Suitable for flashing and non-flashing light hydrocarbons, even with low vapor pressure margins
- Seal faces have soft torque transmission
- Seal faces are shrouded in steel collars so that they cannot break apart in pieces in an emergency case
- Resistant to alignment issues between the pump case and shaft because of stationary springs
- Containment seal is rated for full dynamic pressure of primary seal, i.e. high degree of safety and environmental protection
- Seal face materials are resistant to solids in the pumped fluid

Technical Excellence

- Simple installation due to pre-assembled cartridge
- Seal faces are designed with FEA & CFD and qualified & tested in the lab
- Can be fitted in older pumps with small seal chambers or stuffing boxes
- High degree of standardization ensures fast deliveries and smart part inventories

Sustainability Excellence

- Zero emission seal design for sustainable environmental protection in combination with plan 75 or plan 76
- Minimized friction and energy consumption

Operating range

Materials

Seal face:

Silicon impregnated carbon (Q3), DiamondFace
Stationary seat: Silicon carbide (Q2),
DiamondFace

Secondary seals: FKM (V), FFKM (K)

Springs: Hastelloy® C-4 (M)

Metal parts: CrNiMo steel (G), Duplex (G1), Super Duplex (G4), Titan (T2), Hastelloy® C-4 (M)

Standards and approvals

- Compliant to TA Luft (German Clean Air Act)

Recommended applications

- Pipeline systems
- Tank farms / storage tanks
- Petrochemical industry
- Refining technology
- Oil & gas production


Recommended piping plans

- [API Plan 11](#)
- [API Plan 12](#)
- [API Plan 13](#)
- [API Plan 32](#)
- [API Plan 72](#)
- [API Plan 75](#)
- [API Plan 76](#)

RELY ON EXCELLENCE

Shaft diameter:
 $d1^* = 50 \dots 138 \text{ mm} (1.97" \dots 5.43")$
 Pressure: $p1 = 100 \text{ bar} (1,450 \text{ PSI})$,
 Static = up to 150 bar (2,175 PSI),
 Dynamic = 5 ... 100 bar (72,5 ... 1,450 PSI)
 Temperature: $t = -20 \dots +150 \text{ }^\circ\text{C} (-4 \dots 302 \text{ }^\circ\text{F})$
 Sliding velocity: $v_g = 50 \text{ m/s} (164 \text{ ft/s})$
 Axial movement: $\pm 1,5 \text{ mm}$

* Additional sizes upon request

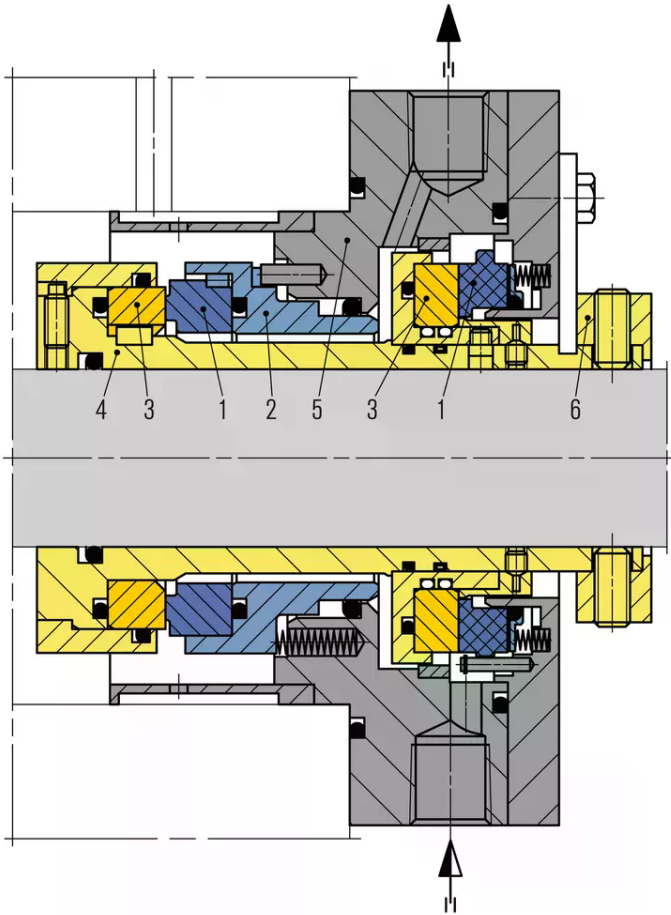

SHI300

Item	Description
1	Seal face
2	Face housing
3	Seat
4	Shaft sleeve
5	Housing
6	Set ring

RELY ON EXCELLENCE

Installation, details, options

Fluid Groups				
Multiple Products	Ethane	Light Flashing Hydrocarbons	Flashing Hydrocarbons	Non-Flashing Hydrocarbons
Ethane, EP Mix, Flashing Hydrocarbons, Non-Flashing Hydrocarbons	Ethane	Ethane, Propane Mix	Propane, Butane, Propylene, Demethanized mixed NGL (y-grade)	Gasoline, Jet Fuel, Diesel Fuel, Kerosene, etc.

Typical fluids in pipeline applications