

RELY ON EXCELLENCE

## Hot water seal L9AW

Mechanical Seals | Mechanical seals for pumps | Pusher seals



### Features

- Rotating multi-spring pusher seals
- Balanced
- Compact in length
- Uniform seal face loading
- Circlip design for ease of assembly
- Independent of direction of rotation
- Specially designed seal faces prevent dry running

### Advantages

- Reduced operation cost on utilities like cooling water
- Can handle hot water up to 120 °C without cooler or jacket cooling
- Narrow cross-section allows the seal fitment in narrow stuffing boxes

### Operating range

Shaft diameter:  $d = 25 \dots 100 \text{ mm}$  (1" ... 3.94")

Pressure:  $p = \text{vacuum to } 20 \text{ bar}$  (290 PSI)

Temperature:  $t = +120 \text{ }^\circ\text{C}$  (+248 °F)

Sliding velocity:  $v_g = 23 \text{ m/s}$  (75 ft/s)

Axial movement:  $\pm 0.5 \text{ mm}$

(Consult EB for applications outside above limits).

### Materials

Seal ring: Carbon graphite antimony impregnated

Mating ring: Silicon carbide

Secondary seals: FKM, FFKM, EPR

Springs: Hastelloy® C-4

Metal parts: SS 316, other materials on request.


### Recommended applications

- Process industry
- Oil and gas industry
- Refining technology
- Petrochemical industry
- Chemical industry
- Pharmaceutical industry
- Power plant technology
- Water and waste water technology
- Building services industry
- Food and beverage industry
- Sugar industry
- Horizontal and vertical pumps, agitators, mixers

### Recommended piping plans

API Plans 01, 11, 12, 13, 14, 61, 62

RELY ON EXCELLENCE

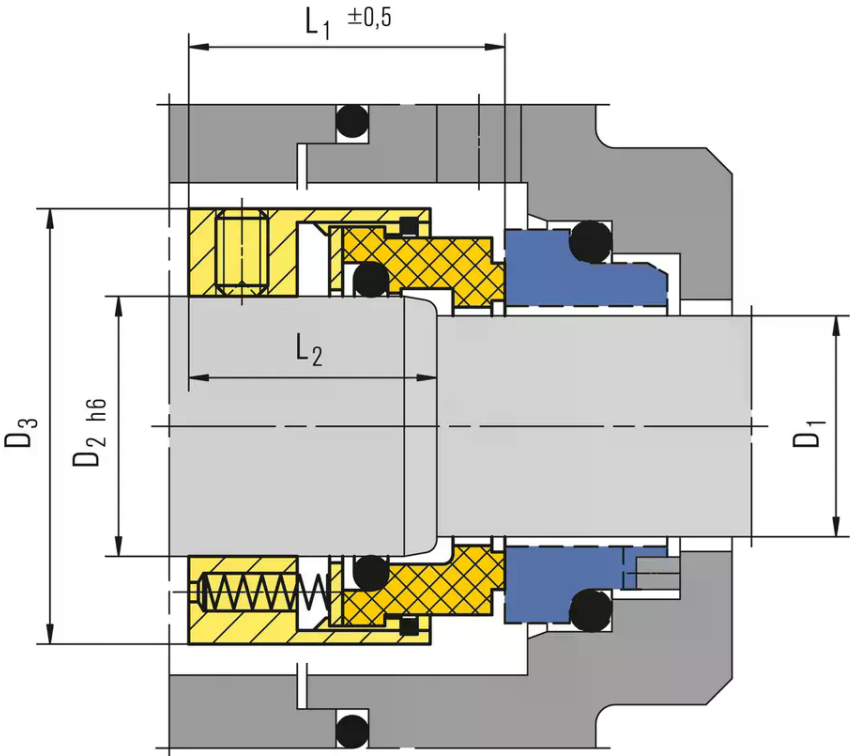

## RELY ON EXCELLENCE

### Dimensions

Dash size	D1	D2	D3	L1	L2
D016	22.23	25.40	36.5	33.5	26.0
D018	25.40	28.58	39.7	35.0	26.0
D020	28.58	31.75	42.9	35.0	26.0
D022	28.58	34.93	49.2	36.5	27.0
D024	31.75	38.10	52.4	36.5	27.0
D026	34.93	41.28	55.6	37.3	27.0
D028	38.10	44.45	58.7	38.1	27.0
D030	41.28	47.63	63.5	38.1	27.0
D032	44.45	50.80	66.7	38.1	27.0
D034	47.62	53.98	71.4	38.1	27.0
D036	50.80	57.15	72.2	44.5	34.0
D038	53.98	60.32	76.2	44.5	34.0
D040	57.15	63.50	79.4	44.5	34.0
D042	60.32	66.67	82.6	46.8	34.0
D044	63.50	69.85	85.7	46.8	34.0
D046	66.67	73.02	94.7	46.8	34.0
D048	69.85	76.20	96.8	46.8	34.0
D050	73.02	79.37	101.6	46.8	34.0
D052	76.20	82.55	104.8	46.8	34.0
D054	79.37	85.72	108.0	46.8	34.0
D056	82.55	88.90	111.1	46.8	34.0
D058	85.72	92.08	114.3	46.8	34.0
D060	88.90	95.25	117.5	46.8	34.0
D062	92.08	98.43	120.7	46.8	34.0
D064	95.25	101.6	123.8	46.8	34.0

### Imperial size

Seal size	D1	D2	D3	L1	L2
0025	25.0	30.0	44.0	37.5	27.5
0028	28.0	33.0	47.0	40.0	30.0
0030	30.0	35.0	49.0	40.0	30.0
0032	32.0	38.0	54.0	40.0	30.0
0033	33.0	38.0	54.0	40.0	30.0
0035	35.0	40.0	56.0	40.0	30.0
0038	38.0	43.0	59.0	41.5	29.5
0040	40.0	45.0	61.0	41.5	29.5
0043	43.0	48.0	64.0	41.5	29.5
0045	45.0	50.0	66.0	41.5	29.5
0048	48.0	53.0	69.0	41.5	29.5
0050	50.0	55.0	71.0	44.5	32.5
0053	53.0	58.0	78.0	44.5	32.5
0055	55.0	60.0	80.0	44.5	32.5
0058	58.0	63.0	83.0	49.5	37.5
0060	60.0	65.0	85.0	49.5	37.5
0063	63.0	68.0	88.0	49.5	37.5
0065	65.0	70.0	90.0	49.5	37.5
0070	70.0	75.0	99.0	54.7	42.0

## RELY ON EXCELLENCE

Seal size	D1	D2	D3	L1	L2
0075	75.0	80.0	104.0	54.7	42.0
0080	80.0	85.0	109.0	54.7	42.0
0085	85.0	90.0	114.0	59.3	47.0
0090	90.0	95.0	119.0	59.3	47.0
0095	95.0	100.0	124.0	59.3	47.0
0100	100.0	105.0	129.0	59.3	47.0

Metric size