

RELY ON EXCELLENCE

HRN

Mechanical Seals | Mechanical seals for pumps | Pusher seals



Features

- Single seal
- Balanced
- Independent of direction of rotation
- Stationary springs
- Dual seals in tandem as well as back-to-back arrangements (also in combination with H10 seal)

Advantages

- Safe operation (no fractures) because of seal face locking by square pin
- Spring unit averted from the product so no sticking and clogging of the springs
- Suitable for pressure reversals
- Operation in vacuum without additional seat locking possible
- No damage of the shaft by a dynamically loaded O-Ring
- Small installation sizes
- Best suitable for conversions, no adaptations of the pump
- Insensitive to solid containing and abrasive media
- Advantages of a balanced seal even with plain shafts
- Insensitive to shaft movements because of the stationary design

Operating range

Shaft diameter:

$d = 18 \dots 100 \text{ mm} (0.71" \dots 3.94")$

Pressure: $p_1^* = 25 \text{ bar} (363 \text{ PSI})$

Temperature:

$t = -40 \text{ °C} \dots +220 \text{ °C} (-40 \text{ °F} \dots 428 \text{ °F})$

Sliding velocity: $v_g = 20 \text{ m/s} (66 \text{ ft/s})$

Axial movement: $\pm 1.0 \text{ mm}$

* Additional seat locking is not needed in vacuum operation. For operation under vacuum it is necessary to arrange for quenching on the atmosphere side.

Materials

Seal face: Carbon graphite resin impregnated (B), Silicon carbide (Q1)

Seat: Silicon carbide (Q1)

Secondary seals: FKM (V), NBR (P), FFKM (K), PTFE (T)

Springs: Hastelloy® C-4 (M)

Metal parts: CrNiMo steel (G)


Standards and approvals

- EN 12756

Recommended applications

- Dirty, abrasive and solid containing media
- Fugitive hydrocarbons (no API seal!)
- Sticky and stringy media
- Water and waste water technology
- Refining technology
- Chemical standard pumps
- Sewage pumps

RELY ON EXCELLENCE

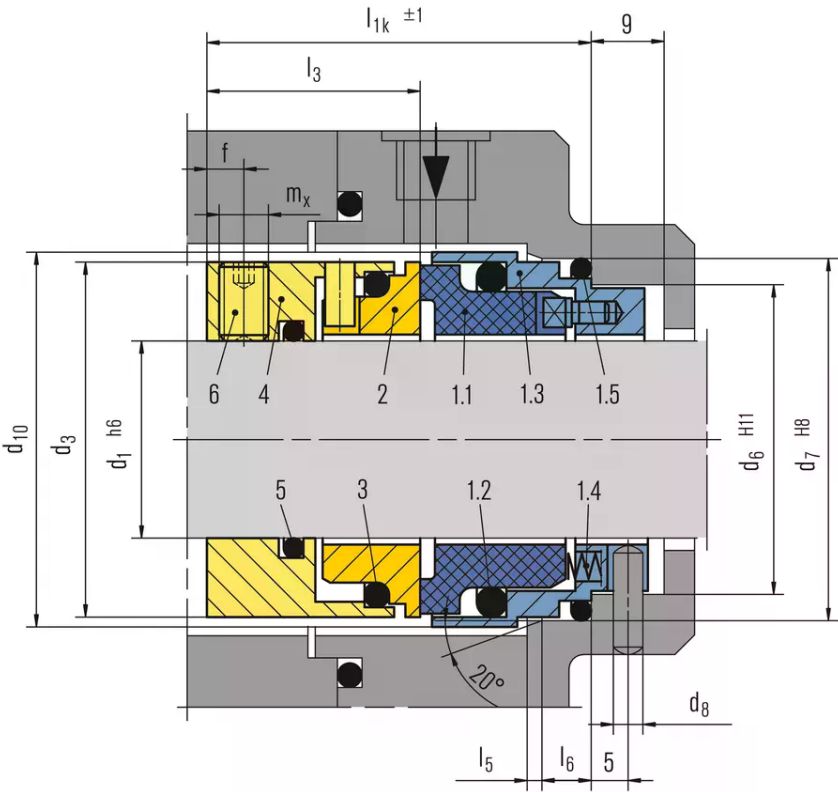

| Item | Part no. toDIN 24250 | Description |
|------|----------------------|--------------|
| 1.1 | 472 | Seal face |
| 1.2 | 412.1 | O-Ring |
| 1.3 | 485 | Retainer |
| 1.4 | 477 | Spring |
| 1.5 | 412.2 | O-Ring |
| 2 | 475 | Seat |
| 3 | 412.3 | O-Ring |
| 4 | 485 | Drive collar |
| 5 | 412.4 | O-Ring |
| 6 | 904 | Set screw |

RELY ON EXCELLENCE

Dimensions

| d ₁ | d ₃ | d ₆ | d ₇ | d ₈ | d ₁₀ | l _{1k} | l ₃ | l ₅ | l ₆ | f | m _x |
|----------------|----------------|----------------|----------------|----------------|-----------------|-----------------|----------------|----------------|----------------|------|----------------|
| 18 | 33 | 27 | 33 | 3 | 34.7 | 37.5 | 19.5 | 2.0 | 5 | 3.0 | 4 |
| 20 | 35 | 29 | 35 | 3 | 36.7 | 37.5 | 19.5 | 2.0 | 5 | 3.0 | 4 |
| 22 | 37 | 31 | 37 | 3 | 38.7 | 37.5 | 19.5 | 2.0 | 5 | 3.0 | 4 |
| 24 | 39 | 33 | 39 | 3 | 40.7 | 40.0 | 20.5 | 2.0 | 5 | 3.5 | 5 |
| 25 | 40 | 34 | 40 | 3 | 41.7 | 40.0 | 20.5 | 2.0 | 5 | 3.5 | 5 |
| 28 | 43 | 37 | 43 | 3 | 44.7 | 42.5 | 21.5 | 2.0 | 5 | 3.5 | 5 |
| 30 | 45 | 39 | 45 | 3 | 46.7 | 42.5 | 21.5 | 2.0 | 5 | 3.5 | 5 |
| 32 | 48 | 42 | 48 | 3 | 49.7 | 42.5 | 21.5 | 2.0 | 5 | 3.5 | 5 |
| 33 | 48 | 42 | 48 | 3 | 49.7 | 42.5 | 21.5 | 2.0 | 5 | 3.5 | 5 |
| 35 | 50 | 44 | 50 | 3 | 51.7 | 42.5 | 21.5 | 2.0 | 5 | 3.5 | 5 |
| 38 | 56 | 49 | 56 | 4 | 57.7 | 45.0 | 24.0 | 2.0 | 6 | 4.0 | 6 |
| 40 | 58 | 51 | 58 | 4 | 59.7 | 45.0 | 24.0 | 2.0 | 6 | 4.0 | 6 |
| 43 | 61 | 54 | 61 | 4 | 62.7 | 45.0 | 24.0 | 2.0 | 6 | 4.0 | 6 |
| 45 | 63 | 56 | 63 | 4 | 64.7 | 45.0 | 24.0 | 2.0 | 6 | 4.0 | 6 |
| 48 | 66 | 59 | 66 | 4 | 67.7 | 45.0 | 24.0 | 2.0 | 6 | 4.0 | 6 |
| 50 | 70 | 62 | 70 | 4 | 71.7 | 47.5 | 25.0 | 2.5 | 6 | 4.0 | 6 |
| 53 | 73 | 65 | 73 | 4 | 74.7 | 47.5 | 25.0 | 2.5 | 6 | 4.0 | 6 |
| 55 | 75 | 67 | 75 | 4 | 76.7 | 47.5 | 25.0 | 2.5 | 6 | 4.0 | 6 |
| 58 | 78 | 70 | 78 | 4 | 80.5 | 52.5 | 28.0 | 2.5 | 6 | 4.0 | 6 |
| 60 | 80 | 72 | 80 | 4 | 82.5 | 52.5 | 28.0 | 2.5 | 6 | 4.0 | 6 |
| 63 | 83 | 75 | 83 | 4 | 85.5 | 52.5 | 28.0 | 2.5 | 6 | 4.0 | 6 |
| 65 | 85 | 77 | 85 | 4 | 87.5 | 52.5 | 28.0 | 2.5 | 6 | 4.0 | 6 |
| 68 | 90 | 81 | 90 | 4 | 92.5 | 52.5 | 28.0 | 2.5 | 7 | 4.0 | 6 |
| 70 | 92 | 83 | 92 | 4 | 94.5 | 60.0 | 34.0 | 2.5 | 7 | 6.0 | 8 |
| 75 | 97 | 88 | 97 | 4 | 100.5 | 60.0 | 34.0 | 2.5 | 7 | 6.0 | 8 |
| 80 | 105 | 95 | 105 | 4 | 108.5 | 60.0 | 34.0 | 3.0 | 7 | 6.0 | 8 |
| 85 | 110 | 100 | 110 | 4 | 113.5 | 60.0 | 34.0 | 3.0 | 7 | 6.0 | 8 |
| 90 | 115 | 105 | 115 | 4 | 118.5 | 65.0 | 39.0 | 3.0 | 7 | 10.0 | 8 |
| 95 | 120 | 110 | 120 | 4 | 123.5 | 65.0 | 39.0 | 3.0 | 7 | 10.0 | 8 |
| 100 | 125 | 115 | 125 | 4 | 128.5 | 65.0 | 39.0 | 3.0 | 7 | 10.0 | 8 |

Dimensions in Millimeter