EagleBurgmann
a member of EKK and FREUDENBERG

RELY ON EXCELLENCE

Buratherm T 9544/T

Packings & Gaskets | Fibre gasket sheets

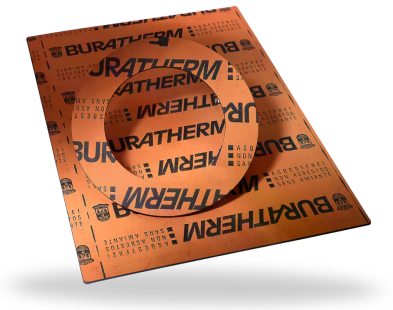

Features

Buratherm T 9544/T is a gasket sheet made from graphite and high-grade aramid fibers with a special anti-stick surface coating.

Notes

For safe operation, always use seals that are dry and undamaged.

Advantages

- High adaptability
- Easy handling
- Easy to process

Operating range

Pressure: p = 150 bar
Temperatur

- Continuous operation:
  t = -100 °C ... +350 °C
- Transient peak temperature:
  t = +380 °C
- Steam: tmax = +360 °C

Recommended surface roughness:
RZ = 20 - 60 µm

Resistant to oils, water, weak acid and lyes.

Recommended applications

Industries

- Process industry
- Chemical industry
- Power plant technology
- Water and waste water technology
- Building services engineering

eagleburgmann.com
info@eagleburgmann.com

All technical specifications are based on extensive tests and our many years of experience. The diversity of possible applications means, however, that they can serve only as guide values.
We must be notified of the exact conditions of application before we can provide any guarantee for a specific case. Subject to change.