

RELY ON EXCELLENCE

## GSS Gas supply system

Seal Supply Systems | Gas supply systems



### Advantages

- Available with a wide range of different instruments
- Safe operation thanks to incorporated pressure regulator with integrated filter
- System mounted on a plate or in housing
- Three variants of the housing version available: painted steel, stainless steel, glass fabric
- Easy wall or rack mounting
- For operating pressures of up to 16 bar (232 PSI)

### Recommended applications

- Chemical industry
- Petrochemical industry
- Oil and gas industry
- Refining technology
- Pharmaceutical industry
- Food and beverage industry

### Features

Gas supply systems of the GSS range are specially designed for contact-free operated, gas-lubricated mechanical seals. The gas supplied from the supply network (e.g. air or nitrogen) is regulated/monitored by the GSS in accordance with the requirements of the seals being supplied. The GSS systems are equipped with alarm and/or switch-off points depending on specific safety requirements. Centralized monitoring of the measurement values is also possible on request.

Circulation in accordance with API 682 / ISO 21049: [Plan 72](#), [Plan 74](#)

### Functional description

Buffered, gas-lubricated mechanical seals may only be used in conjunction with adequately pressurized gas (e.g. from a closed circular nitrogen pipeline provided by the operator). For Plan 74 systems the barrier gas pressure level p3 must always be higher than the pressure level p1 of the sealed product, whatever the operational state of the machine. The minimum pressure overlay level ( $\Delta p$ ) is specified for the individual seal types.

Main GSS functions:

## RELY ON EXCELLENCE

---

- Filtering of the buffer and flushing gas
- Pressure monitoring and regulation
- Flow monitoring

Typical tasks for the GSS:

- Buffer/barrier gas supply for double seals
- Gas flushing for single seals
- Gas supply for tandem seals

### Notes

To assure a sufficient supply of the mechanical seal, pressure at entry of the supply system must be min. 2 bar (29 PSI) above max. barrier pressure always.

## Installation, details, options

Operating and installation diagram for a GSS system.

## RELY ON EXCELLENCE

### Product variants

#### GSS4016/A1... range(system mounted on a plate)

Description
Pressure gauge
Flow for smallmeasuring range
Flow for largemeasuring range

#### GSS4016/A2... range(system in housing)

Description
Pressure gauge
Flow for smallmeasuring range
Flow for largemeasuring range

#### GSS4016/A3... range(system in stainless steel, in housing)

Description
Pressure gauge
Flow for smallmeasuring range
Flow for largemeasuring range


#### GSS4016/A... range(system in housing)

Description
Preferred systemfor agitator seal type
Pressure gauge
Flow for smallmeasuring range
Flow for largemeasuring range
Pressure to be sealed
Barrier pressure mechanical seal
Design pressure
Material housing

## RELY ON EXCELLENCE

**GSS6000/A4... range(System acc. to API682 4. edition, mounted on a plate)**

Designation	
API-Plan	
Design code	
Allowable pressure	
Allowable temperature	
Process connections	
Metal parts	

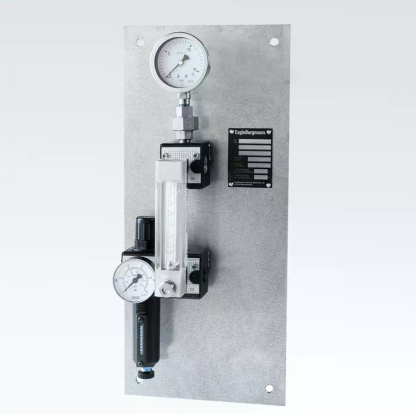

**GSS4016**  
mounted on a plate